AQUAPRO

BATTERY WATERING AND CHARGING SOLUTIONS

OPPORTUNITY CHARGER

Superior Energy Efficiency from
Controlled Flux Transformer Technology



Technical Specifications

Model (Example)	OC24-3PH-0550
Voltage Options	24 - 80
AH Range (8hr)	550 - 1450
Input Phase	**Single | Three**
Input Voltage	**208 | 240 | 480**
Warranty	5 Years
Dimensions	24 x 17 x 36 (L x W x H)
Weight	100 - 350lbs

Smart Features

- **Auto Watering**
- **Temperture Compensation**
- **Cycle Statistics**
- **Real Time Clock**
- **Easy Programming**
- **Minimal Maintenance**

APPLICATION

Opportunity Charge
Multi-shift 12-hr Daily Usage

Weekly Equalization
Ample time for weekly equalization


1:1
Each battery has a dedicated charger

WATERING AND CHARGING SOLU

support@aquapro-na.com 888-841-3121 www.aquapro-na.com

AUTO-H_2O

AUTOMATIC WATERING

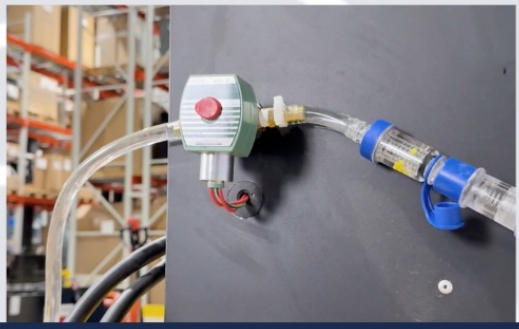



Automate Your Battery Watering

Manual watering leads to dry cells, acid overflows, shortened lifespans, and OSHA safety risks—costing your business time and money.

Total Accountability with AquaPro

AquaPro's charger-controlled system takes the guesswork out of maintenance. The charger tracks schedules, manages equalization, and tops off water levels automatically. Your operators simply plug in the battery, and the system handles the rest.

Why Choose AquaPro?

- **Never Missed Cycles: If a scheduled charge is missed, the system automatically performs the required equalization and watering on the very next charge.**
- **Built-In Safety Sensors: An electrolyte sensor immediately alerts operators via the charger display if water levels are low or the supply is shut off.**

Want to see how it works?

visit: www.aquapro-na.com to see the demonstration video.

AQUAPRO

BATTERY WATERING AND CHARGING SOLUTIONS

WATERING AND CHARGING SOLU

support@aquapro-na.com 888-841-3121 www.aquapro-na.com